

Guangzhou Best Electronic Technology Co., Ltd.

LED Track Light D-MINI Series(CuLinder)



- External driver box design
- Lifud flicker-free driver 220-240V AC, 50/60 Hz PF>0.95 (Tridonic, Osram optional)
- 10W-37W CREE COB, 83/95Ra
- UGR<16
- For 2 wires, 3 wires, three-circuit track or surface mounting
- Rotation angle 350°
- Swivel angle 350°
- Colors: Matte White/Matte Black
- 5 years warranty
- Aluminum Housing
- 0-10V/ DALI/ Triac dimming available



BST-TL-D-MINI


Specification:

Part No.:	Power	LED Current	Light efficiency (type)	Color rendering index	Color Temperature	Beam angle	Working temperature
BST-TL-10W -D-MINI	10W	250mA	>100lm/W	>80Ra	2700-5000K	15°, 24° 36°, 60°	-30℃~+45℃
BST-TL-20W -D-MINI	20W	500mA	>100lm/W				
BST-TL-30W -D-MINI	30W	750mA	>100lm/W				
BST-TL-37W -D-MINI	37W	900mA	>100lm/W				


CREE COB only can reach 5000K, if 6000K is requested, please choose CITIZEN COB(10-30W).

The photometric values are standard values and refer to the entire luminaire.

In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

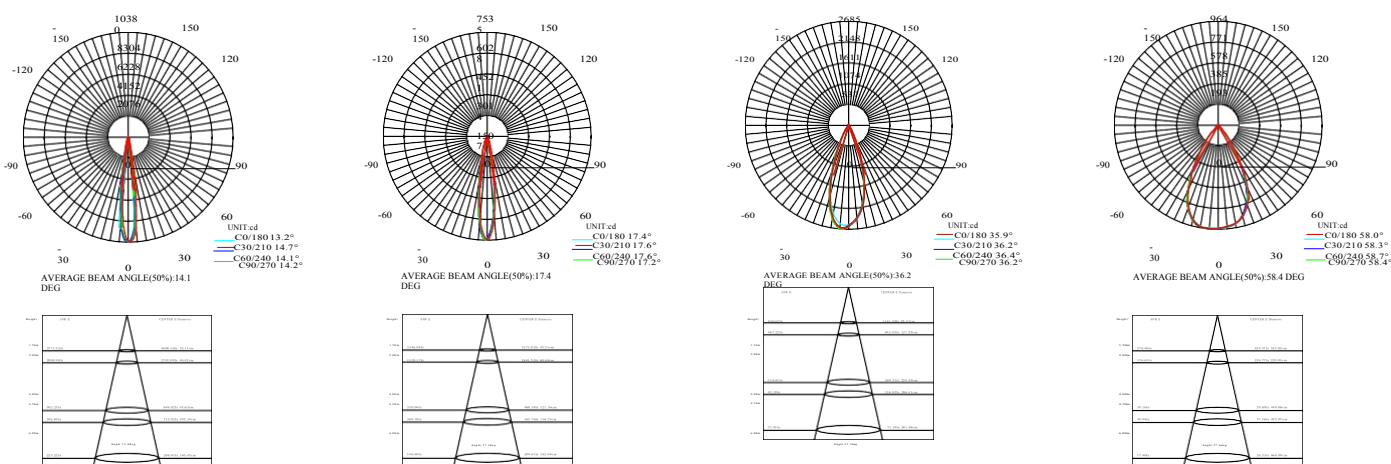

Dimension:

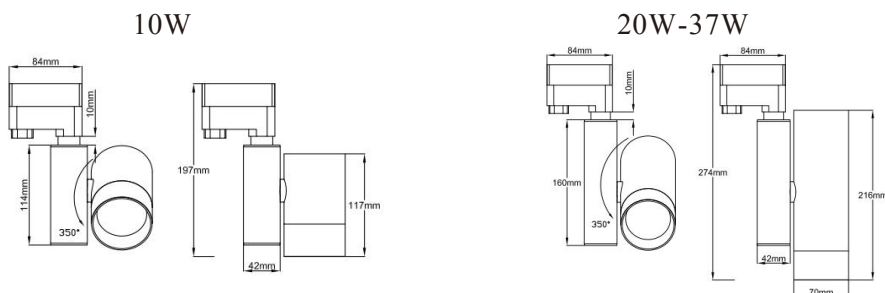

Packing:

10PCS/CTN

Carton size: 10W-20W: 60*31*25.5cm
30W-37W: 69*30*32.5cm

N.W: 7KG
N.W: 9.5KG

G.W: 8.5KG
G.W: 11KG