


# Guangzhou Best Electronic Technology Co., Ltd.

## 1.0 Description.

- Osram constant-current isolation power driver, 220-240V AC, 50/60 Hz PF>0.90 (Tridonic optional)
- Samsung 2835 SMD, 80Ra.(90Ra optional)
- Beam angle: Double Asymmetric, 90°
- Rotation angle 350°
- Swivel angle 150°
- Colors: White/Black
- 5 years warranty
- Aluminum Housing
- 0-10V/ DALI/ Triac dimming available
- UGR<19, soft ray
- CE,ROHS Certificate
- IP20

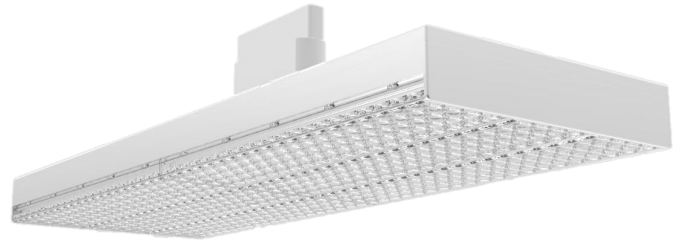


BST-TPB-35-50-70W  
LED Track Panel Bay

## 2.0 Specification


Part NO.	Power	Luminous Flux	Light efficiency	LED chip	CRI	CCT	Beam angle	Working temperature
BST-TPB -35W	35W	5250-5425lm	150-155lm/W	3*80	>80	2700-6500K	90° DA	-25°C ~+45°C
BST-TPB -50W	50W	7000-7500lm	140-150lm/W					
BST-TPB -70W	70W	10150-10850lm	145-155lm/W	6*80				

## 3.0 Dimension.

Unit:mm

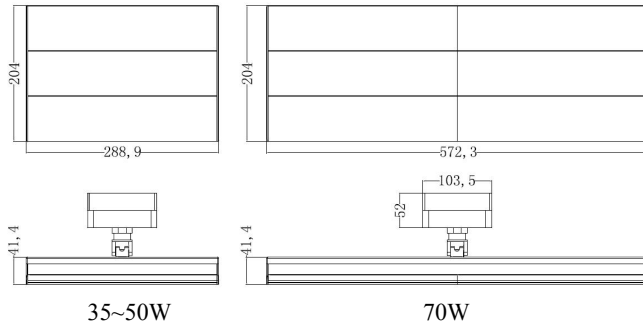

## 4.0 Light Distribution.

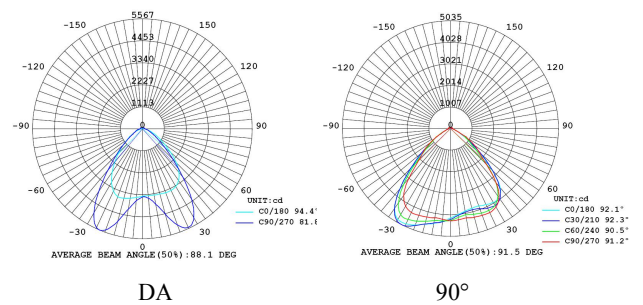

Another two solutions for beam angle:

DA LENS	90° LENS	DA LENS	DA LENS	90° LENS	90° LENS
90° LENS	DA LENS	90° LENS	90° LENS	DA LENS	DA LENS
DA LENS	90° LENS	DA LENS	DA LENS	90° LENS	90° LENS

35~50W 70W

## 5.0 Packing.

Part NO	pcs/ctn	NW(Kg)	GW(Kg)	Packing size (L*W*H(mm))
BST-TPB-35W	1	1.85	3.03	
BST-TPB-50W	1	1.83	3.03	
BST-TPB-70W	1	3.05	4.73	