



The perfect continuous LED linear solution for industry, commercial and other applications.


BEST Linear Trunking System LB series is not a simple light, it is a integrated lighting solution. With its advantages of energy-efficiency, low maintenance costs and convenient installation, it is an ideal alternative to traditional linear fluorescent lights in a variety of industrial and commercial applications. BEST Lighting System is a modular concept consisting of trunking rails, luminaire inserts and accessories.

Certificates:



The BEST-LLB trunking system for challenging lighting demands in all applications. With fully compatible modular kit, it adapts individually to complex lighting tasks. All functions such as power supply and lighting control are integrated into this multi functional trunking. Luminaires can be positioned flexibly and the system can be adapted to suit structural alterations at any time. The trunking rail is simply a matter of replacing or adding lighting modules, light sources or optics as required.

We use 6063 Aluminum material for the lamp body. Thermal Conductivity reaches 237 W/m·K

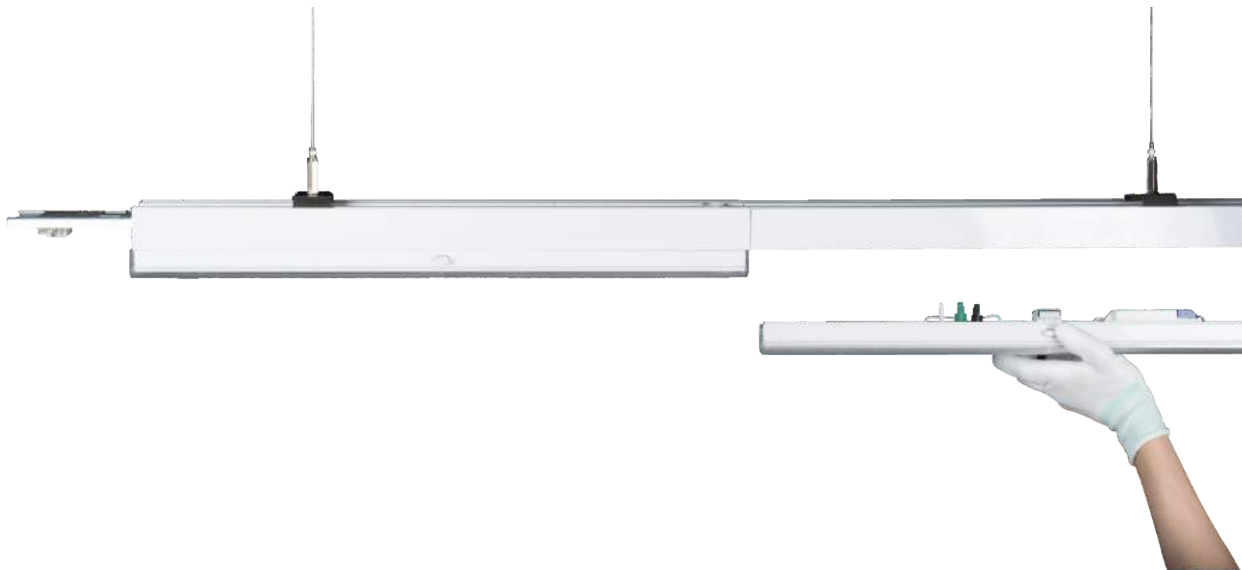

1. TRUNKING RAIL

Trunking rail is standard with 3, 5, 7 or 11 cores through-wiring with 2.5mm² cable cross-section. Separate power supplies, dimming or emergency supply can be integrated with the 7 cores wiring.

2. LIGHT SOURCE

The fitting is designed to operate a range of LED' s up to 70W. 2835 SMD.

3. OPTICS

Narrow, wide distribution, right/left/double asymmetric available.

4. DIMENSIONS

1140mmx68mmx68mm /1424mmx68mmx68mm.

5. MOUNTING

Suspended or surface mounted.
cord hanger, ceiling mounting clip
track spot light.

6. APPLICATION

Suitable for indoor use only.

7. Accessories


8. Packing

The cable in the trunking with pre-assembled connectors makes it possible to join trunking units without any tools, 3 circuit pre-selection via moving of contact pin prior to installation in rail.

- 3-CORE SYSTEM

Standard function: L, N, G.

Individual use/ Single-phase linkable use.

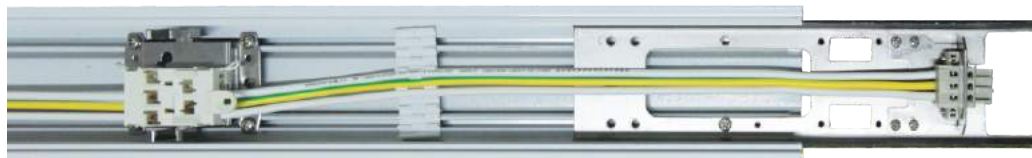


- 5-CORE SYSTEM

Standard light function, 3-Circuit optional,

Independent switchable circuits for easy light control,

Individual use/ Three-phase linkable use.

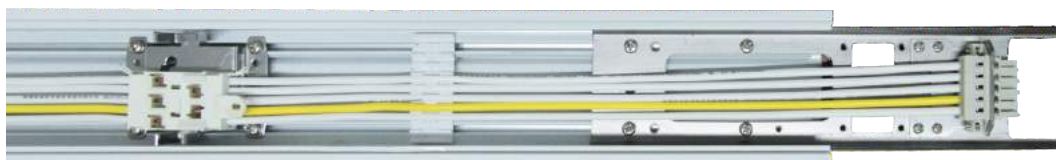

- 7-CORE SYSTEM

Standard and dimming function

Standard and emergency function

Three-phase linkable use.


Dimming Function:

DALI, 1-10V.

Emergency Lighting Function:

1. Built-in battery: 1800mAh/3600mAh(NiMH).

2. External emergency supply: generator, central UPS.

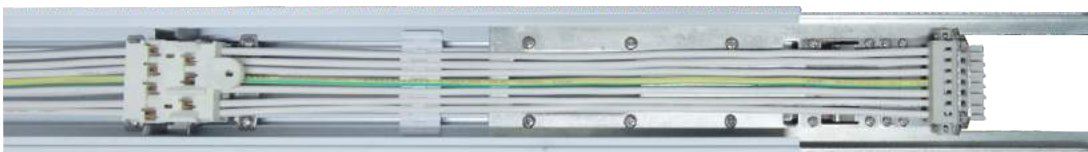


● 11-CORE SYSTEM

Standard and dimming function
Standard and emergency function
Standard and dimming function & emergency function
Three-phase linkable use.

Dimming Function:
DALI, 1-10V.

Emergency Lighting Function:
1. Built-in battery: 1800mAh/3600mAh(NiMH).
2. External emergency supply: generator, central UPS.



2.5mm² cable carrying 16A, we can run maximum 65 meters of continued luminaire under 220V AC with 70W 1424mm luminares each.

For instance, total power of circuit: $P=UI=220V \times 16A=3520W$.

Total quantity of luminaire it could bear $3520W/75W=46$ units.

Total length: $1.4 \times 46 \approx 65$ meters.



155lm/W
5 Years Warranty



Switch built in luminaire,
easy and convenient for installation
and maintenance

LB series	Length	Wattage	CRI	Colour Temp	Luminous Flux
	1140mm	35W/50W	>80Ra	2700-6500K	5425m/7750lm
	1424mm	35W/50W/70W			5425lm/7750lm/10850lm

Power Supply (flickering or flickering-free for your options)





LED

- Life time > 54000 hours
- Lm80 Test Report
- UL RoHS CUL Certificate
- Eye Safety Certificate

Aluminum PCB

- High thermal conductivity
- High pressure resistant

All system components, trunking rail and luminaire inserts are perfectly matched. Modules can be positioned in the rails with randomly defined distances according to system dimensions for both trunking rail and individual luminaire installations.


With a color rendering index of $R_a > 80$, Color temperatures of 2700K, 3000K, 4000K, 5000K, 5700K and 6000K, it could meet environmental requirements for energy-efficient building and lighting solutions.

For special applications where requests high accuracy of color, such as in museum, printing factory and so on, CRI95 linear series is highly recommended.



LENS

- PMMA material
- High transparency
- Fireproofing

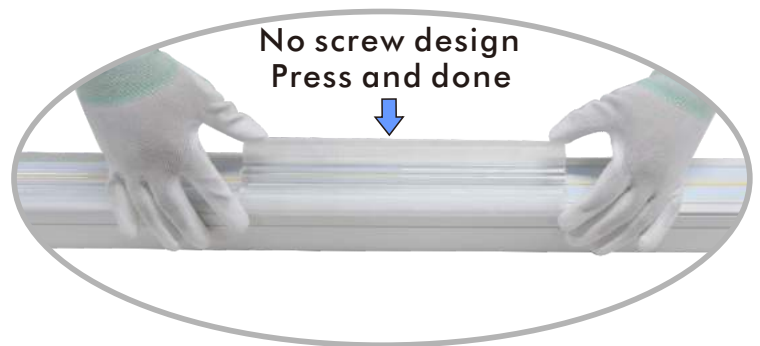

Different optics for different distributions



Wide
(90°)







(Double Asymmetric)




DIALux files, IES files can be provided for your lighting projects


For special applications where required low UGR, normally, it works with wide 90°

DIMENSION

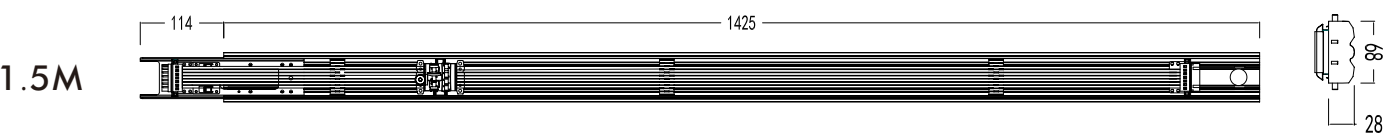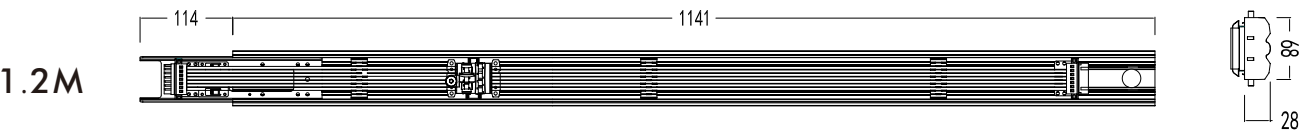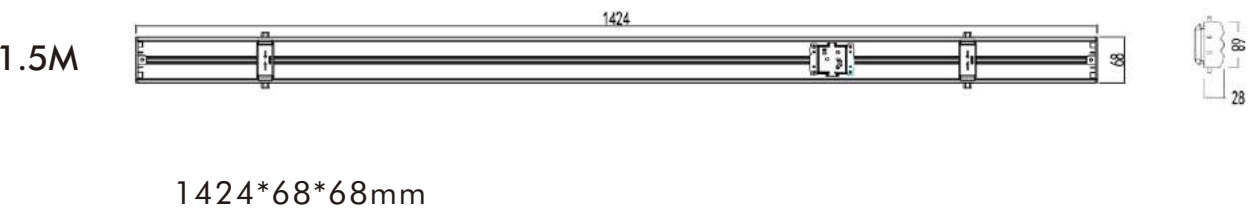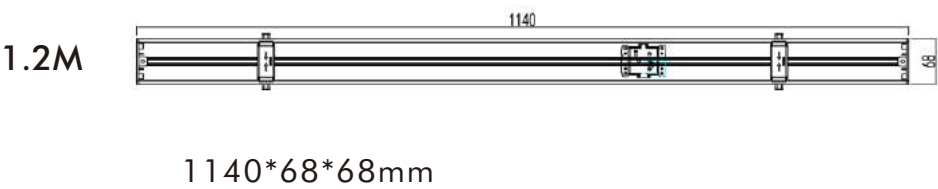

Unit: mm

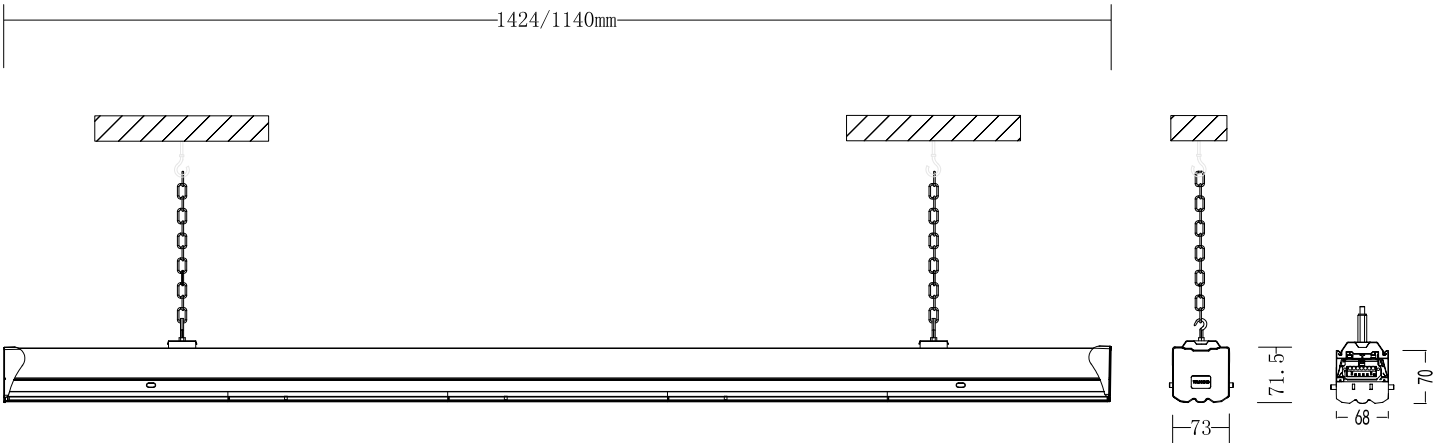

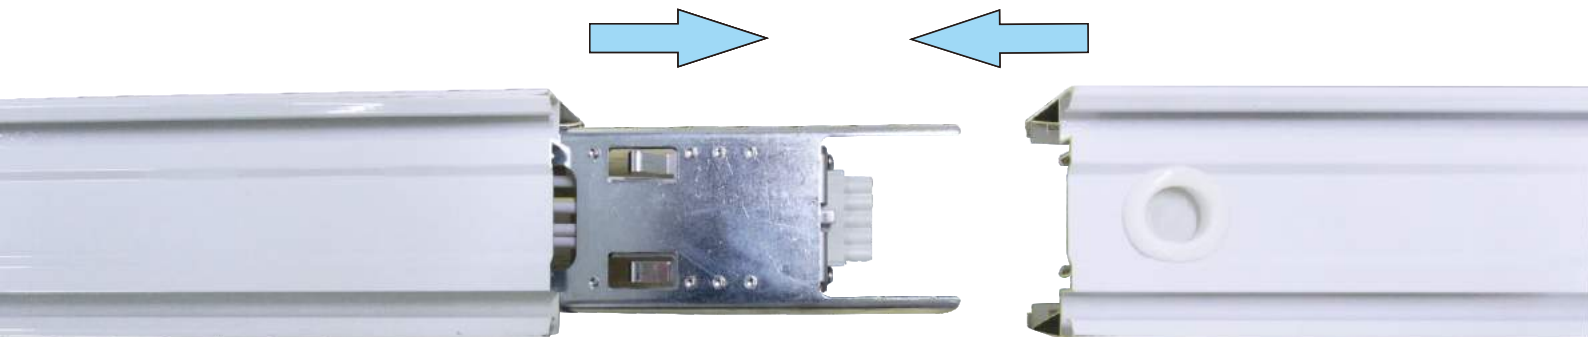


SUSPENDED CORD



SURFACE MOUNTED



SUSPENDED CHAIN

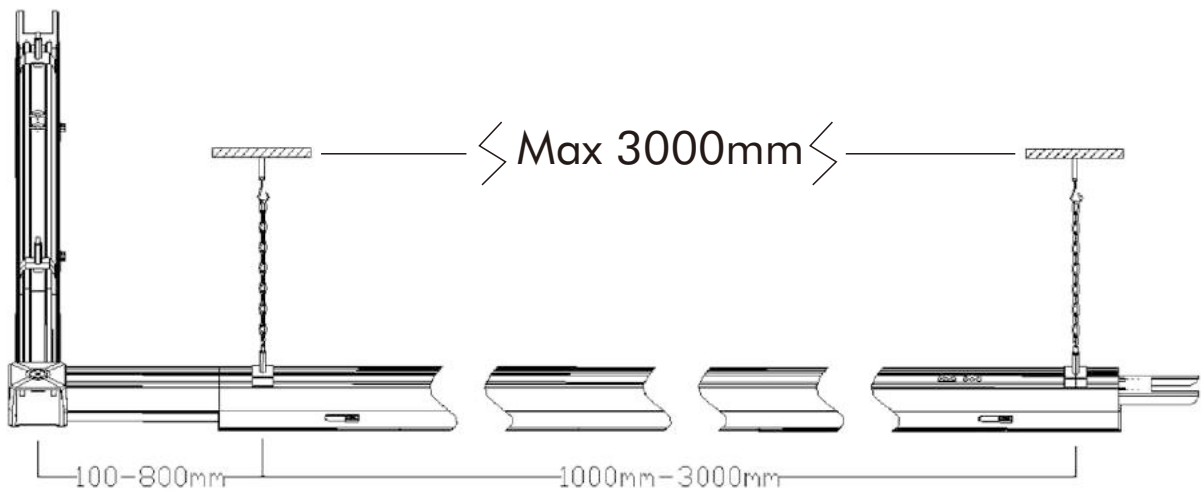



We also supply LED track lights as bellow. If you have any need of them, please feel free to contact us.



BST-TL-A	Light colour 2700-5000K	Driver Topxin	Light efficiency 100lm/W	Beam 15° 24° 38° 60°
	Wattage 10w 20w 30w 10w	LED CREE Citizen	Wire Three-phase 4 wire	Colours Black White



BST-TL-C01 Zoomable	Light colour 2700-5000K	Driver Lifud(no flickering)	Light efficiency 100lm/W	Beam 16°-60°
	Wattage 10w 20w 30w 37w	LED CREE Citizen	Wire Three-phase 4 wire	Colours Black White



BST-TL-C	Light colour 2700-5000K	Driver Lifud(no flickering)	Light efficiency 100lm/W	Beam 12° 24° 38° 60°
	Wattage 10w 20w 30w 37w	LED CREE Citizen	Wire Three-phase 4 wire	Colours Black White

(Following project pictures are from our customers)



Power feed-in connector



3 wire



5 wire




7 wire

Phase selection part



3/5 core



7 core



11 core


For electrical connecting luminaire with trunking rail
3/5/7/11 pins socket part and "L" pin for phase selection



End cap



Cable gland



Blank cover

Mounting accessories



Surface-mounted



Suspension cord



Suspension chain


Node connectors




"I" node

With linkable parts

Size: 1352*447*135mm
Weight: 14KG
5PCS/Carton

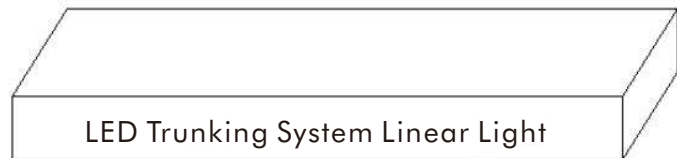


Size: 1632*447*135mm
Weight: 17.5KG
5PCS/Carton

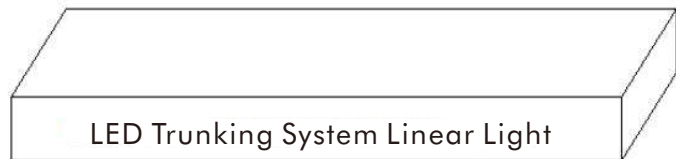

Without linkable parts

Size: 1215*447*145mm
Weight: 13KG
5PCS/Carton

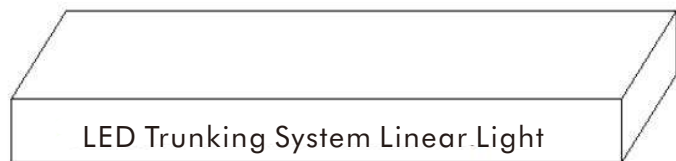

Size: 1515*447*145mm
Weight: 16.5KG
5PCS/Carton

