



### LED Down Light R Series Specifications

Input voltage:220-240Vac  
 CREE /CITIZEN COB, 83Ra/95Ra, LM80 Standard, low light decay, high brightness.  
 Using Lifud constant-current isolation power driver, long lifetime.  
 Die-cast aluminium housing for excellent thermal conductivity.  
 0-10V, DALI, Triac dimming control system is possible  
 Colors: White/Black  
 CE ROHS Certification.




Model No.:	Power	LED Current	Light efficiency (type)	Color rendering index	Color Temperature	Beam angle	Working temperature
BST-SDH-10W-R	10W	250mA	>85lm/W	>80Ra	2700-5000K	60°	-30℃~+45℃
BST-SDH-15W-R	15W	350mA	>85lm/W				
BST-SDH-20W-R	20W	500mA	>90lm/W				
BST-SDH-30W-R	30W	700mA	>90lm/W				
BST-SDH-40W-R	40W	950mA	>90lm/W				


The photometric values are standard values and refer to the entire luminaire. In the case of CRI ≥ 90, the efficiency is approx. 10-15 % lower.

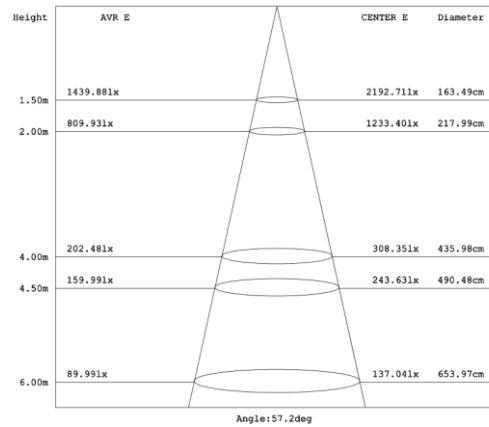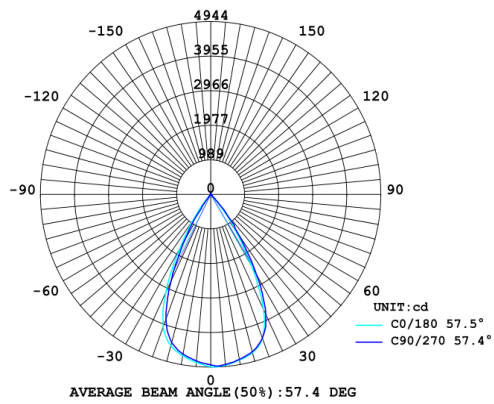


### Dimension




**10W**




**15W**



**20W**



**30W**



**40W**

### Packing

10W 32PCS Carton:40\*40\*24 CM G.W 13.5KG/CTN  
 15W 24PCS Carton:46\*35\*28 CM G.W 14KG/CTN  
 20W 18PCS Carton:42\*42\*35 CM G.W 17KG/CTN  
 30W 12PCS Carton:53\*36\*38 CM G.W 19KG/CTN  
 40W 8 PCS Carton:41\*41\*42 CM G.W 15.5KG/CTN

