



LED High Bay Light UFO Series Specifications

CE,ROHS certificate
 Mean Well IP65 driver,
 Input voltage 100-277Vac
 No UV or IR in the beam
 Easy to install and operate
 Energy saving, long lifespan
 Instant start, NO flickering, NO humming
 Green and eco-friendly without mercury
 Output constant current lever can be
 adjusted through output cable with 1-10V.







Model No.:	Power	LED QTY	Light efficiency (type)	Color rendering index	Color Temperature	Beam angle	Working temperature
BST-UFO-100W	100W	210Pcs (2835)	130lm/W	>80Ra	2700-6500K	90°,120°	-30℃~+45℃
BST-UFO-150W	150W	280Pcs (2835)	130lm/W				
BST-UFO-180W	180W	350Pcs (2835)	130lm/W				
BST-UFO-240W	240W	350Pcs (3030)	140lm/W				

The photometric values are standard values and refer to the entire luminaire. In the case of CRI ≥ 90, the efficiency is approx. 10-15 % lower.

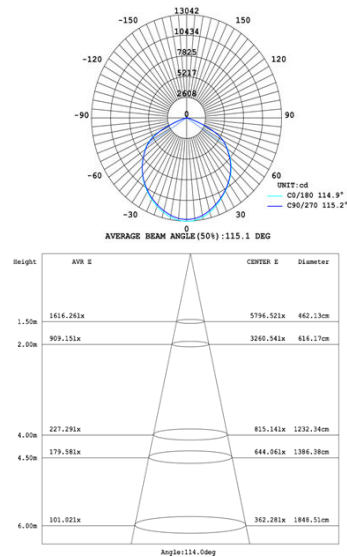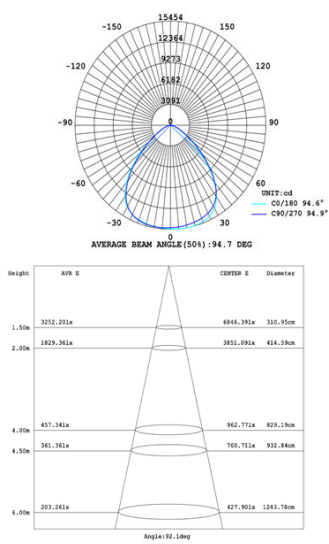

Dimension



Packing

100W Carton: 41*41*13.5CM
 150W Carton: 43.5*43.5*13.5CM
 180W Carton: 46*46*13.5CM
 240W Carton: 46*46*13.5CM

